


GOTHIC ECONO-VENT

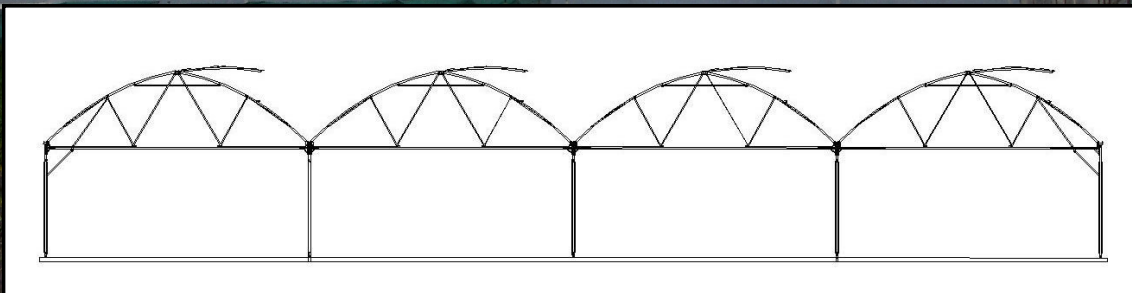

SINGLE VENT

Specifications: Gothic Econo-Vent

Bay Width:	8 or 9.6 metres
Post spacing:	4 metres between posts
Height to gutter:	4.3—5.3 metres
Total height:	6.7—7.7 metres
Ventilation:	Single Vent 12.5% of floor area
Vent mechanism:	Ridder motors and controllers, indirect Geared rack and pinion system
Frame Guard Tape	Fitted to all roof members that touch the plastic
Roof cladding:	Single or double-skin Celloclim bubble Film or polycarbonate
Wall cladding:	Single or double-skin Celloclim film
Gutter:	Aluminium with condensation collection
Awnings:	Top and bottom awning aluminium
Doors:	Sliding door with 1150mm metal kick panel at bottom Plastic top panel
Footings:	1 metre deep x 0.450 diameter (depending On soil type) with 150mm x 150mm pedestal for post connection
Wind load:	Designed to local municipality wind category requirements
Crop loading:	Designed to individual loading requirements
Build time:	6-8 weeks from receipt of deposit to on-site construction